


100AMP, 5 CIRCUIT LOAD CENTER
 50AMP. BREAKER 2-POLE
 30AMP. BREAKER 1-POLE
 20AMP. BREAKER 1-POLE


14-50R
 50AMP.
 RECEPTACLE

LOOP FEED LUG TERMINAL BAR








WIRE RANGE TABLE :

CONNECTOR	COPPER		ALUMINUM	
	SOLID	STRAND	SOLID	STRAND
LINE	14-8	14-1/0	12-8	12-1/0
LOAD	14-10	14-10	---	---
NEUTRAL	14-4	14-4	14-4	14-4
EQUIP. GRND.	12-8	12-2	12-8	12-2
POST LINE CONNECTORS SUITABLE FOR LOOP FEED	#1-300 KCMIL		#1-300 KCMIL	
EQUIP. GRND.	12-2	12-2	12-2	12-2

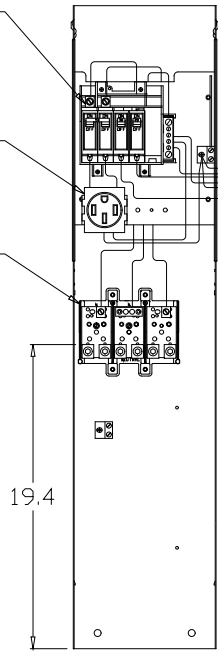

BREAKER
 KD

5-20R2GFI
 20AMP.
 GFI DUPLEX
 BR32U
 30AMP.
 RECEPTACLE

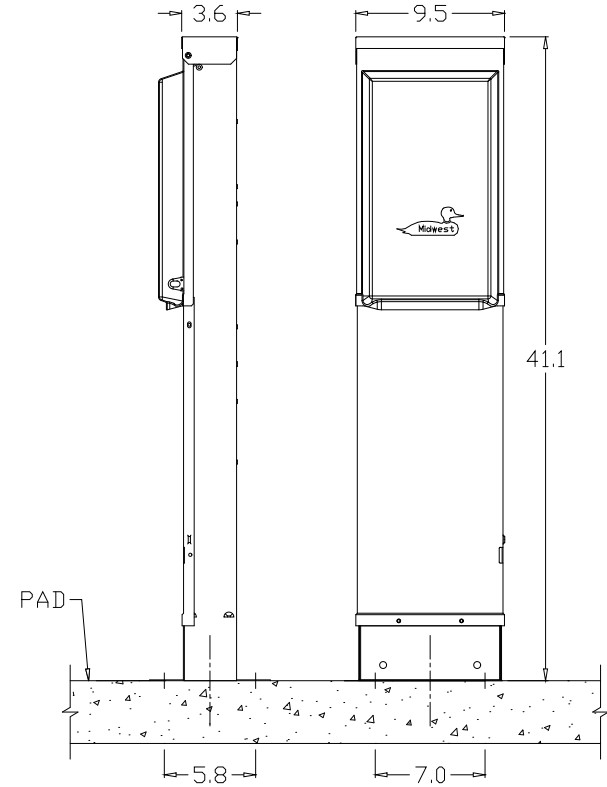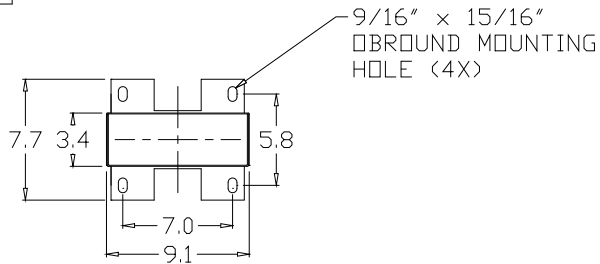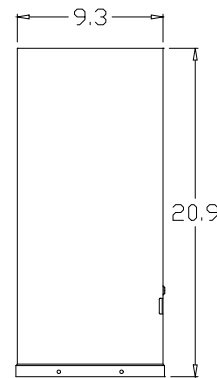


SH100



www.bbelec.com
 888.391.3802

NOTES: PAD MOUNTED POST

MIDWEST ELECTRIC PRODUCTS, INC. Mankato, MN 	* = Critical To Quality		TITLE: U075CP4010	
	Unless Otherwise Specified		AutoCad Generated	
Dr. By: JDE	Tolerances In:	SCALE	SIZE	DWG NO:
Ck. By:	3 Pl. Decimals ± .010	1 : 1	A	198B8604
CR: R0815611	2 Pl. Decimals ± .030	SHEET 1 OF 1		
	Fractions ± 1/32			
	Angles ± 1/2°			
	Holes ± .003			
	Dimensions Are In Inches			

Rev.1 CR: R0815611 JE: 3-12-08