


Meter Main w/ Load Center Pedestal

100–200 Amp | 4 Terminals | Ringless | 120/240 VAC

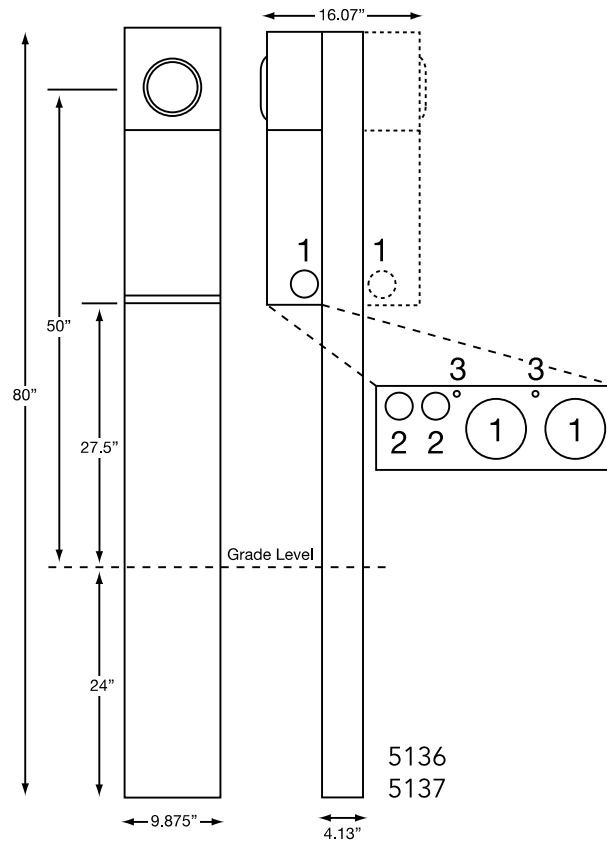

U5136-O-200S-FMG

Specifications

- UL listed File E90945
- 200 amp maximum, 120/240 V, 1Ø3W
- Ringless type meter socket with stainless steel latch
- Short circuit withstand rating 10 KAIC, 22 KAIC available. Consult factory.
- Type 3R construction for durable outdoor use
- ASA 61 grey polyester powder coat finish
- Wire terminations accept copper or aluminum conductors
- Line & Neutral: (2) #6-350 kcmil per phase, Line Ground: (4) #14-1/0
- Load (CB): 2/0 to 300 kcmil per pole
- Load neutral: (1) #6-350 kcmil
- Load ground: (2) #14-1/0, (4) #14/6
- Commercial grade, plug-in main circuit breaker. Available in 100, 125, 150 & 200 AMP. Type UQFP-M.
- 4 circuit plated copper interior accepts (2) 2-pole or (4) 1-pole standard plug-in type circuit breakers. Branch circuit rated to 125 amp max. Acceptable manufacturers: Milbank, Cutler-Hammer, GE or Siemens



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

Meter Main w/ Load Center Pedestal

100–200 Amp | 4 Terminals | Ringless | 120/240 VAC

27
METER MAIN
W/ LOAD CENTER
PEDESTAL

100–200 Amp | Meter Main w/Load Center Pedestal | Ringless

Catalog Number	Powerheads	Amp	Main Breaker	Interior	Dimensions			Knockouts		
					D"	W"	H"	1	2	3
U5136-O-100S-FMG	Single	100	UQFP-M-100 (Series)	4 circuit	10¼	10	80	2	½,¾	¼
U5136-O-125S-FMG	Single	125	UQFP-M-125 (Series)	4 circuit	10¼	10	80	2	½,¾	¼
U5136-O-150S-FMG	Single	150	UQFP-M-150 (Series)	4 circuit	10¼	10	80	2	½,¾	¼
U5136-O-200S-FMG	Single	200	UQFP-M-200 (Series)	4 circuit	10¼	10	80	2	½,¾	¼
U5136-O-100P-FMG	Single	100	UQFP-M-100 (Parallel)	4 circuit	10¼	10	80	2	½,¾	¼
U5136-O-125P-FMG	Single	125	UQFP-M-100 (Parallel)	4 circuit	10¼	10	80	2	½,¾	¼
U5136-O-150P-FMG	Single	150	UQFP-M-100 (Parallel)	4 circuit	10¼	10	80	2	½,¾	¼
U5136-O-200P-FMG	Single	200	UQFP-M-100 (Parallel)	4 circuit	10¼	10	80	2	½,¾	¼
U5136-O-FMG	Single	—	Breaker provision	4 circuit	10¼	10	80	2	½,¾	¼
U5137-O-100S-FMG	Double	100	(2) UQFP-M-100 (Series)	4 circuit	16¼	10	80	2	½,¾	¼
U5137-O-125S-FMG	Double	125	(2) UQFP-M-125 (Series)	4 circuit	16¼	10	80	2	½,¾	¼
U5137-O-150S-FMG	Double	150	(2) UQFP-M-150 (Series)	4 circuit	16¼	10	80	2	½,¾	¼
U5137-O-200S-FMG	Double	200	(2) UQFP-M-200 (Series)	4 circuit	16¼	10	80	2	½,¾	¼
U5137-O-100P-FMG	Double	100	(2) UQFP-M-100 (Parallel)	4 circuit	16¼	10	80	2	½,¾	¼
U5137-O-125P-FMG	Double	125	(2) UQFP-M-100 (Parallel)	4 circuit	16¼	10	80	2	½,¾	¼
U5137-O-150P-FMG	Double	150	(2) UQFP-M-100 (Parallel)	4 circuit	16¼	10	80	2	½,¾	¼
U5137-O-200P-FMG	Double	200	(2) UQFP-M-100 (Parallel)	4 circuit	16¼	10	80	2	½,¾	¼
U5137-O-FMG	Double	—	Breaker provision	4 circuit	16¼	10	80	2	½,¾	¼

Notes

- **Parallel to Series Conversion:** For field converting from parallel wired to series wired order **K5194**.
- **Fifth Terminal:** For field installed fifth terminal, order **K5T**.
- **Penta Bolt Locking:** For field installed pedestal fronts penta bolt locking, order **K5039**.
- **Receptacles:** Consult factory for installed receptacle assemblies.
- **Pad Mount Units:** Pad mount pedestals are available. Order **U5138** (single meter) or **U5139** (double meter) prefix. **K5035** pad mount kit required. Order separately.
- If more than two receptacles are needed please contact factory for details.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

