


How to Convert 240 Volt 3-Wire Meter Used on a 120 Volt 2-Wire Circuit

FRONT VIEW OF SOCKET

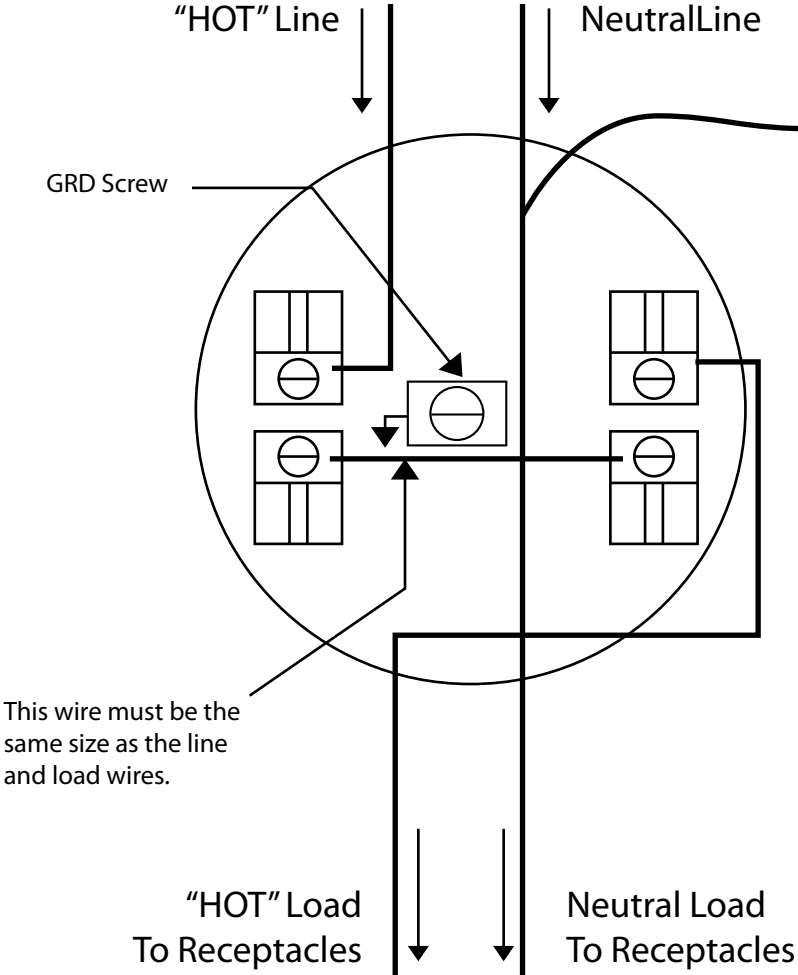

REAR VIEW OF METER

NEUTRAL CONNECTION FROM SOCKET
 If line neutral is connected to ground screw, it is OK to connect this wire there also. Otherwise this connection must be made to neutral at some other point. (Suggestion: The neutral terminal in the Power Outlet Box, or neutral terminal on the receptacle.

NEUTRAL CONNECTION TO REAR OF METER
 Loosen screws and slide clip as far as possible. Connect a small flexible wire (Wire size #18-22) to the screw on which the clip remains when opened.
WARNING! Connecting this wire to the wrong screw will trip site breaker, or cause a flash, if not protected by a site breaker.