


Power Outlet Pedestals

125 Amps | Metered | 120/240 VAC



U5300-O-75

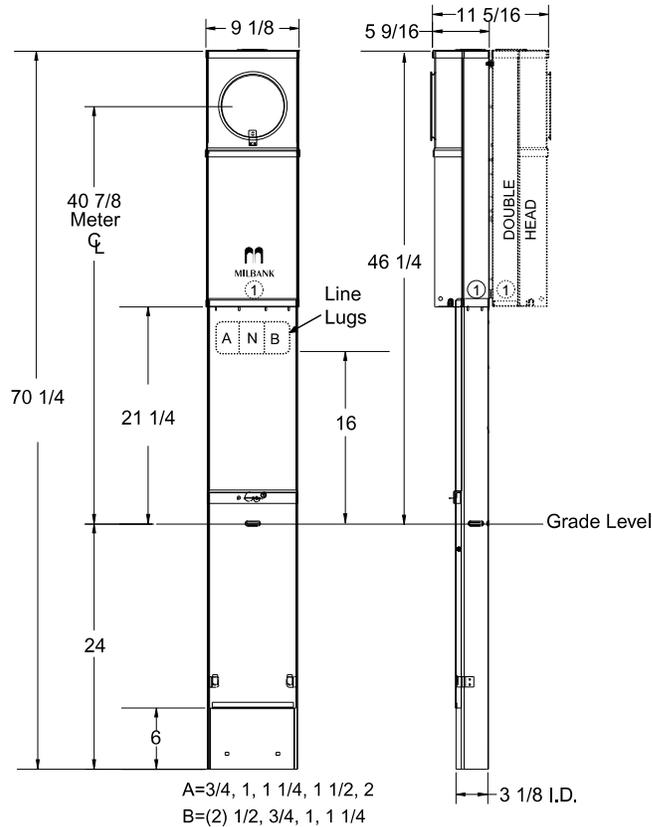

Specifications

- UL Listed 125 amps, 120/240 volts—1Ø power outlet.
- Short circuit current withstand rating 10,000 RMS symmetrical amperes.
- Type 3R welded enclosure for durable outdoor use.
- Enclosure constructed with galvanized 16 gauge steel.
- Direct burial or pad mounted post constructed with 14 gauge galvanized steel. Two removable front covers for ease of installation. Accepts up to (3) 2 1/2" conduits.
- ASA 61 grey polyester powder coat finish.
- Wire terminations accept copper or aluminum conductors for loop feed wiring. Line: (2) #6-350 kcmil
Ground: (2) #14-2/0 Neutral: (2) #6-350 kcmil
- Six circuit plated copper interior accepts standard plug-in type circuit breakers. Rated up to 125 amps.
- Three position self-grounded receptacle bridge accepts most standard NEMA receptacles with mounting plates.
- Four terminal, drawn ring type meter socket with aluminum sealing ring.
- Components factory wired with stranded copper wire.
- Lockable hinge cover and dead front are removable for installation and maintenance. Stay-open hinge cover has safety interlock on dead front. Dead front must be removed before hinge cover can be removed.
- Low wattage, 120 volt fluorescent site light available. Factory or field installable.
- Unit weight | single: 53 lbs., double: 80 lbs.



Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

Power Outlet Pedestals

125 Amps | Metered | 120/240 VAC

11
MILLENNIUM
SERIES
POWER OUTLET
PEDESTALS

125 Amp | Metered Power Outlet Pedestals

Catalog Number	Mounting Type	Powerheads	Receptacle Configuration	Circuit Breaker Configuration	Loop Feed	Connectors (Line)	Dimensions			Knockouts
							D"	W"	H"	
U5300-O	Direct Burial	Single	—	—	Yes	#6-350	5 ⁵ / ₁₆	8 ¹¹ / ₁₆	70 ¹ / ₄	1 ¹ / ₄
U5300-O-41	Direct Burial	Single	A	X	Yes	#6-350	5 ⁵ / ₁₆	8 ¹¹ / ₁₆	70 ¹ / ₄	1 ¹ / ₄
U5300-O-55	Direct Burial	Single	B	Y	Yes	#6-350	5 ⁵ / ₁₆	8 ¹¹ / ₁₆	70 ¹ / ₄	1 ¹ / ₄
U5300-O-75	Direct Burial	Single	C	Z	Yes	#6-350	5 ⁵ / ₁₆	8 ¹¹ / ₁₆	70 ¹ / ₄	1 ¹ / ₄
U5310-O	Pad Mount	Single	—	—	Yes	#6-350	5 ⁵ / ₁₆	8 ¹¹ / ₁₆	46 ¹ / ₄	1 ¹ / ₄
U5320-O	Direct Burial	Double	—	—	Yes	#6-350	11 ³ / ₁₆	8 ¹¹ / ₁₆	70 ¹ / ₄	1 ¹ / ₄
U5320-O-75	Direct Burial	Double	C	Z	Yes	#6-350	11 ³ / ₁₆	8 ¹¹ / ₁₆	70 ¹ / ₄	1 ¹ / ₄
U5330-O	Pad Mount	Double	—	—	Yes	#6-350	11 ³ / ₁₆	8 ¹¹ / ₁₆	46 ¹ / ₄	1 ¹ / ₄

Receptacle Configurations

A	B	C
(1) TT30R, (1) 5-20R GFI	(1) 14-50R, (1) 5-20R GFI	(1) 14-50R, (1) TT30R, (1) 5-20R GFI

Circuit Breaker Configurations

X	Y	Z
(1) 30A, 1P, 120V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 20A, 1P, 120V	(1) 50A, 2P, 120/240V (1) 30A, 1P, 120V (1) 20A, 1P, 120V

Notes

- 20 amp GFI receptacles are weather resistant and tamper resistant.
- 20 amp GFI required at each RV site by UL and NEC 551-71.
- Internal light kits are available factory or field installed. See accessories page.
- Contact factory for additional configurations not shown here.

Utility requirements for this equipment may vary. Always consult the serving utility for their requirements prior to ordering or installing this equipment. This product must be installed by a licensed electrician. Installation of this equipment may require local electrical inspector approval.

